

FLYFINE



FLYFINE

Model	FF-AC3142CON-ENERGY2	FF-AC3071EUH-EGG	FF-AC 3111/3221 EUH-EGG
Standard	GB	EU	EU
Power	7kW	7kW	11/22kW
Input / Output Voltage	220VAC/220VAC	230VAC/230VAC	400VAC/400VAC
Input Frequency	50Hz	50/60Hz	50/60Hz
Output Current	32A	32A	16A/32A adjustable
Rated Residual Operating Current	AC30mA	AC30mA+DC6mA	AC30mA+DC6mA
Over Temperature Protection		≥95℃	
Charging Start Mode		Plug and play,RFID,APP	
Operating Temperature		-30℃ ~ +50℃	
Storage Temperature		-40℃ ~ +85℃	
Relative Humidity		5%-95% No condensation	
Life Time Of Connector		≥10000 times	
Mean Time Between Failure		MTBF≥30000h	
APP/Communication		Support/WIFI, BLE, 4G Optional	
Cable Length		5 meters (Customizable)	
Weight		1.8KG (cable not included)	
Color		White	
Power Plug	GB(Standard)	EU (Standard)	EU (Standard)
Connector Type	GB/T 20234.2-2015	IEC 62196-2 Type 2	IEC 62196-2 Type 2
Maximum Altitude		2000m	
Charging Plug/Socket		Separate from the Host	
Degree Of Protection		Charging Connector IP54,Host IP66/IK10	
Host Dimension		353*256*113(mm)	
Wiring method		Enter and out at the bottom	

Wall-Mounted EV Charger

Innovative


- ▶ Type 2 cable / Type 2 socket
- ▶ Wall-mount / Floor-stand
- ▶ Start modes: RFID/Plug&Play / App
- ▶ From 0-500Km cost around 3.5 hours (22KW)

Secure and Safe

- ▶ 30mA Type A +6mA DC residual current protection
- ▶ Charging Connector IP54,Host IP66/IK10
- ▶ Multiple protection to ensure the users safety

Intelligent

- ▶ Multi communications(WiFi/4G/BLE)
- ▶ App charging scheduling

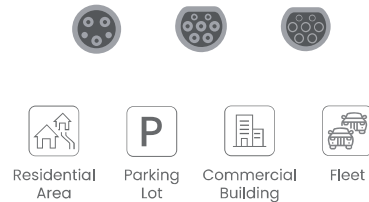

Wall-Mounted EV Charger

Note: The technical data above mentioned may be updated or revised due to product development. The data in this brochure is subject to change without notice.