

FLYFINE



Wall-Mounted EV Charger

Innovative


- ▶ Wall-mount / Floor-stand
- ▶ Start modes: RFID/Plug&Play /App

Secure and Safe

- ▶ Leakage Detection: Type A or TypeA+DC6mA
- ▶ IP54
- ▶ Multiple protection to ensure the users safety

Intelligent

- ▶ PWM Signal At CP End
(Amplitude: ±12V, Frequency=1kHz)
- ▶ Meet the latest ROHS standard requirements

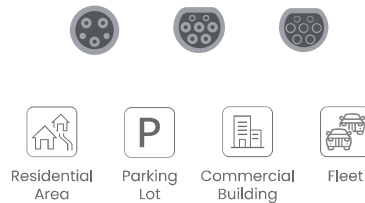

FLYFINE

Model	FF-AC3071CNO-05
Standard	GB
Power	7kW
Input / Output Voltage	174V-265V(Rated 220V)/174V-265V(Rated 220V)
Output Current	32A
Voltage Measurement Accuracy	±1%
Current Measurement Accuracy	<0.5A
Leakage Detection	Type A or TypeA+DC6mA
PWM Signal At CP End	Amplitude: ±12V, Frequency=1kHz
PWM Duty Cycle	53.34% ± 0.5% @1kHz
Control Board Power Consumption	<5W
Noise	≤40dB
Cooling Method	Free cooling
Control Logic	Accord with GB/T 18487.1-2015
Test Specifications	Accord with GB/T 34657.1-2015
Operating Temperature	-30℃ ~ +55℃
Storage Temperature	-40℃ ~ +85℃
Working Altitude	2000m
Relative Humidity	5%RH ~ 95%RH
ROSH	Meet the latest ROHS standard requirements
Host Size	315*245*105mm
Degree Of Protection	IP54

Wall-Mounted EV Charger