

# FLYFINE



# FLYFINE

Model	FF-AC3112USH-LJK
Standard	US
Power	11.5kW
Input / Output Voltage	208-240VAC/208-240VAC
Input Frequency	50/60Hz
Output Current	16A/24A/32A/40A/48A adjustable
Rated Residual Operating Current	CCID20
Over Temperature Protection	≥95℃
Mean Time Between Failure	MTBF≥30000h
Charging Start Mode	Plug and Play, RFID, APP
APP/Communication	Support/WIFI, BLE, 4G Optional
Relative Humidity	5% ~ 95% No condensation
Maximum Altitude	2000m
Life Time Of Connector	≥10000 times
Test Specifications	GB/T 34657.1-2015
Operating /Storage Temperature	-30℃ ~ +55℃ / -40℃ ~ +85℃
Cable Length	5 meters (Customizable)
Wiring Method	Enter and out at the bottom
Connector Type	IEC 62196-2 Type 2
Power Plug	EU (Standard)
Color	White/Black/Dark Grey
Host Dimension	204*364*90mm
Degree Of Protection	Charging Connector IP54,Host IP66/IK10

## Wall-Mounted EV Charger

### Innovative


- ▶ Wall-mount
- ▶ Start modes: RFID/Plug&Play / App

### Secure and Safe

- ▶ CCID20 Residual Current Protection
- ▶ Charging Connector IP54,Host IP66/IK10
- ▶ Multiple protection to ensure the users safety

### Intelligent

- ▶ Multi communications(WiFi/4G/BLE)
- ▶ App charging scheduling

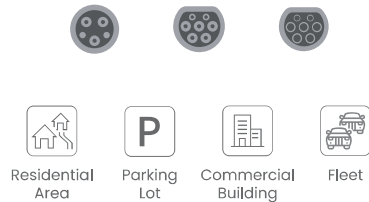

## Wall-Mounted EV Charger

Note: The technical data above mentioned may be updated or revised due to product development. The data in this brochure is subject to change without notice.

FLYFINE