

# FLYFINE



## Portable Mode 2 EV Charger

### Innovative


- ▶ Connector Type: GB/T 20234.2-2015
- ▶ Charging Mode: Plug&Play

### Secure and Safe

- ▶ AC30mA Rated Residual Operating Current
- ▶ Charging Connector IP54, Host IP66
- ▶ Multiple Protection To Ensure The Users Safety

### Intelligent

- ▶ 1.3 Inch OLED Display Screen  
(Current/Voltage/Timing/Temperature)
- ▶ Indicator Lights  
(Power/Charging/Error/Status)

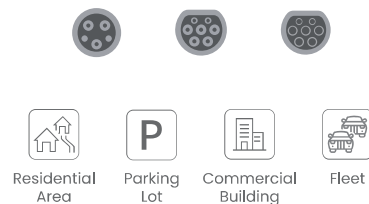

# FLYFINE

Model	FF-EV216CN
Standard	CN
Power	3.5kW
Input / Output Voltage	220VAC/220VAC
Output Current	8A/10A/13A/16A adjustable
Over Temperature Protection	>95℃
Rated Residual Operating Current	AC30mA
Charging Mode	Plug and Play
Operating /Storage Temperature	-30℃ ~ +50℃ /-40℃ ~ +85℃
Relative Humidity	5%-95% No condensation
Life Time Of Connector	≥10000 times
Mean Time Between Failure	MTBF≥30000h
Metal Wire Sectional Area	2.5mm <sup>2</sup>
Cable Length	5 meters (Customizable)
Weight	3 kg (with cable)
Color	Black/Dark Grey
1.3 Inch OLED Display Screen	Current/Voltage/Timing/Temperature
Power Plug	GB (Standard)
Connector Type	GB/T 20234.2-2015
Maximum Altitude	2000m
Indicator Lights	Power/Charging/Error/Status
Degree Of Protection	Charging Connector IP54, Host IP66
Host Dimension	218*84*54.5 mm



## Portable Mode 2 EV Charger

Note: The technical data above mentioned may be updated or revised due to product development. The data in this brochure is subject to change without notice.