

FLYFINE



Wall-Mounted EV Charger

Innovative


- ▶ Wall-mount
- ▶ Start modes: RFID/Plug&Play /App

Secure and Safe

- ▶ Leakage Detection: Type A or TypeA+DC6mA
- ▶ IP54
- ▶ Multiple protection to ensure the users safety

Intelligent

- ▶ PWM Signal At CP End
(Amplitude: ±12V, Frequency=1kHz)
- ▶ Meet the latest ROHS standard requirements

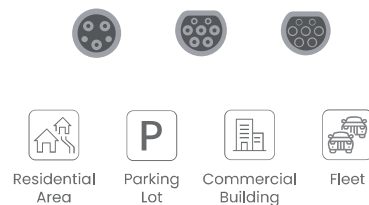

FLYFINE

Model	FF-AC3221EUO-META0-XJ
Standard	EU
Power	22kW
Input / Output Voltage	230 VAC±20%, Single; 400 VAC±20%, three-phase
Output Current	32A
Voltage Measurement Accuracy	±1%
Current Measurement Accuracy	<0.5A
Leakage Detection	Type A or Type A + DC6mA
PWM Signal At CP End	Amplitude: ±12V, Frequency=1kHz
PWM Duty Cycle	53.34% ± 0.5% @1kHz
Power Consumption Of The Control Board	<5W
Noise	≤40dB
Cooling Method	Natural cooling
Control Logic	GB/T 18487.1-2015
Test Specifications	GB/T 34657.1-2015
Operating Temperature	-30℃ ~ +55℃
Storage Temperature	-40℃ ~ +85℃
Working Altitude	2000m
Relative Humidity	5%RH ~ 95%RH
ROSH	Meets the requirements of the latest ROHS standards
Dimensions Of The Main Unit	261 x 486 x 140mm
Ingress Protection	IP54

Wall-Mounted EV Charger

Note: The technical data above mentioned may be updated or revised due to product development. The data in this brochure is subject to change without notice.